
Gea Signaling

6 references · 3 versions · Recessed LED marker light

A compact recessed LED marker light for paths, steps and edges in outdoor floors, in 100-240 V and 12 V AC/DC versions.



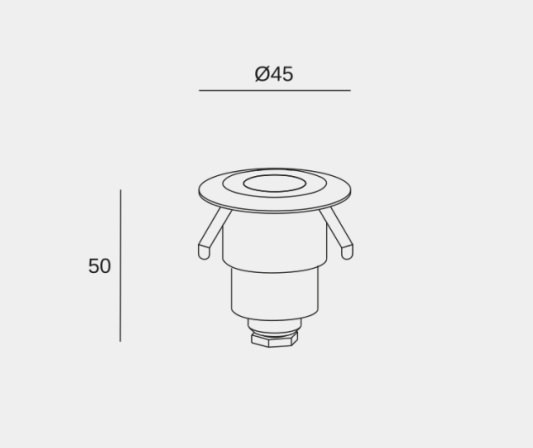

Shown: 12V AC/DC ø45 mm

TECHNICAL DATA

Light source:	LED
Power:	0.5 - 2.2 W
Lumen output:	12 - 52 lm
Efficacy:	23 - 24 lm/W
Colour temperature:	3000K / 4000K
CRI:	80
Beam angle:	68° / 96°
Dimming:	On-Off (100-240V)
IP rating:	IP66-IP67
UGR:	≤19 / ≤22
Dimensions:	Ø45 × 50 / Ø60 × 90 / Ø60 × 60 mm
Material:	Anodized aluminium, crystal diffuser
Voltage:	100-240V / 50-60Hz; 12V AC/DC
Insulation class:	I (100-240V) / III (12V AC/DC)
Lifespan:	50,000 h L80B20
Warranty:	5 years
Also:	IK10 (100-240V) / IK05 (12V AC/DC)

VERSIONS

Version	Dimensions	Power	Light output	CCT	Beam angle	Refs
12V AC/DC ø45 mm	Ø45 × 50 mm	0.5 W	12 lm	3000K / 4000K	68°	2
100-240V ø60 mm	Ø60 × 90 mm	2.2 W	52 lm	3000K / 4000K	96°	2
12V AC/DC ø60 mm	Ø60 × 60 mm	1 W	23 lm	3000K / 4000K	68°	2

Every reference is listed with its own values on the product page.

Compact inbouw LED-oriëntatielicht voor paden, trappen en randen in buitenvloeren, in uitvoeringen op 100-240 V en 12 V AC/DC.

Balisage LED encastré compact pour les allées, les marches et les bordures des sols extérieurs, en versions 100-240 V et 12 V AC/DC.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.