
Gea DRY

18 references · 3 versions · Recessed LED ground uplight

The DRY® recessed LED ground uplight in ø185, ø220 and ø300 mm, with a head that tilts ±15° and turns 360°, for trees, facades and planted areas.



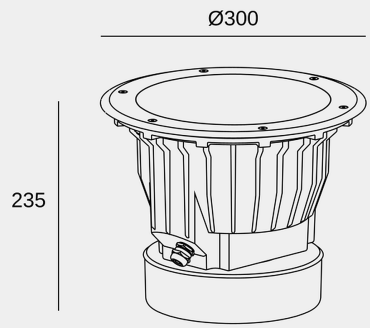

Shown: ø300 mm

TECHNICAL DATA

Light source:	LED
Power:	13.4 - 40.3 W
Lumen output:	1589 - 5878 lm
Efficacy:	104.9 - 145.9 lm/W
Colour temperature:	2700K / 3000K / 4000K
CRI:	80
Beam angle:	21° / 54° (ø185), 18° / 53° (ø220), 18° / 51° (ø300)
Dimming:	On-Off, DALI/PUSH
IP rating:	IP65-IP67
UGR:	≤16 / ≤19 / ≤22
Dimensions:	Ø185 × 200 / Ø220 × 230 / Ø300 × 235 mm
Material:	Aluminium body, AISI 316 stainless steel trim, tempered glass diffuser
Voltage:	100-240V / 50-60Hz; 220-240V / 50-60Hz
Insulation class:	I
Lifespan:	50,000 h L80B20
Warranty:	5 years
Also:	Gea Dry® patented anti-condensation system; IK10, suitable for vehicle traffic (ø300 mm: IK10); 2 reflectors, honeycomb panel and asymmetric filter included

VERSIONS

Version	Dimensions	Power	Light output	CCT	Beam angle	Refs
ø185 mm	Ø185 × 200 mm	13.4 W	1589 - 1690 lm	2700K / 3000K / 4000K	21° / 54°	6
ø220 mm	Ø220 × 230 mm	27.9 W	2927 - 3110 lm	2700K / 3000K / 4000K	18° / 53°	6
ø300 mm	Ø300 × 235 mm	40.3 W	5478 - 5878 lm	2700K / 3000K / 4000K	18° / 51°	6

Every reference is listed with its own values on the product page.

De DRY® inbouw LED-grondspot in ø185, ø220 en ø300 mm, met een kop die ±15° kantelt en 360° draait, voor bomen, gevels en beplanting.

Encastré de sol LED DRY® en ø185, ø220 et ø300 mm, à tête inclinable de ±15° et orientable sur 360°, pour arbres, façades et espaces plantés.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.