

Foamy Wall

7.3201.0xN1.xxxx.xx · 9 references · Acoustic LED wall panel

An acoustic LED wall panel: a powder-coated steel frame with a round, class A sound-absorbing Foamy panel and a soft built-in glow, in 500, 750 and 1000 mm, in white, black or graphite, 3000K.

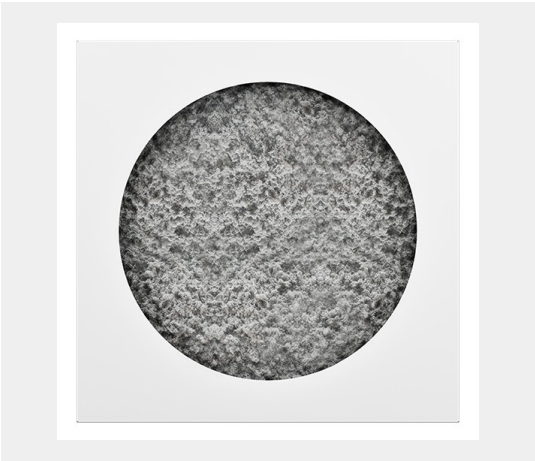

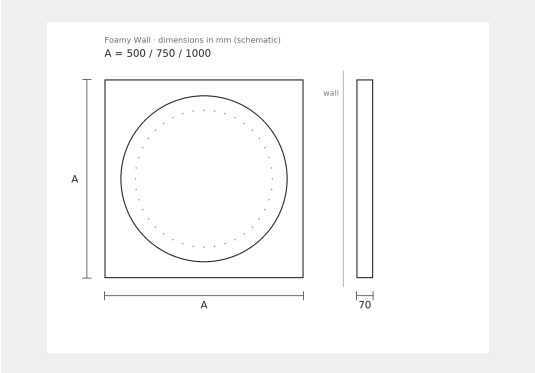

TECHNICAL DATA

Type:	Acoustic LED wall panel
Power:	11.2 - 26.5 W
Lumen output:	123 - 292 lm
Colour temperature:	3000K
CRI:	>90
Dimming:	On-Off
Driver:	Built-in
IP rating:	IP20
Dimensions:	500 × 500 / 750 × 750 / 1000 × 1000 mm, depth 70 mm
Mounting:	Wall mounted, direct light; wing nuts, magnets and safety cord
Material:	Powder-coated steel housing, Foamy acoustic filling 35 mm (dark grey)
Voltage:	220-240V, 50-60Hz
Insulation class:	I
Lifespan:	50,000 h L80 B10
Acoustics:	Sound absorption class A (αw 0.9); fire class B-s1,d0; carbon-neutral, M1-certified filling

VERSIONS

Size	Light	Power / light output	Control	Finish
500 × 500 mm	3000K	11.2 W · 123 lm	On-Off	White / Black / Graphite
750 × 750 mm	3000K	17.7 W · 195 lm	On-Off	White / Black / Graphite
1000 × 1000 mm	3000K	26.5 W · 292 lm	On-Off	White / Black / Graphite

Codes: 7.3201.01N1 / 02N1 / 03N1 (500 / 750 / 1000 mm) . 1621 (3000K, On-Off) . 43 white (RAL9016) / 53 black (RAL9005) / H3 graphite (RAL7024).
REFERENCES: 9 refs, all references are listed per version on the product page.

Akoestisch LED-wandpaneel: een gepoedercoat stalen frame met een rond Foamy-paneel met geluidsabsorptie klasse A en een zachte ingebouwde gloed, in 500, 750 en 1000 mm, in wit, zwart of grafiet, 3000K.

Panneau mural acoustique LED : cadre en acier thermolaqué avec disque Foamy absorbant classe A et une douce lueur intégrée, en 500, 750 et 1000 mm, en blanc, noir ou graphite, 3000K.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.