
Selentis Linear

6041.270.35.5 · 1 reference · Alabaster LED wall light, linear

Selentis Linear: a long alabaster bar with softly rounded ends that glows warmly from within, with a 2700K LED and an included phase-cut dimmable driver.



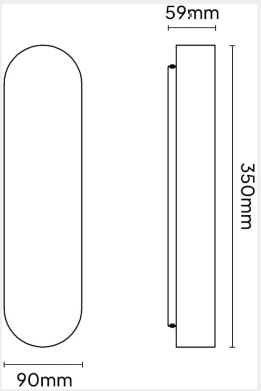

TECHNICAL DATA

Power:	8 W
Lumen output:	550 lm
Efficacy:	68.8 lm/W
Dimensions:	90 × 350 × 59 mm
Light source:	Bridgelux SMD2835 LED
Colour temperature:	2700K
CRI:	>90
UGR:	<19
IP rating:	IP20
Dimming:	Phase cut (driver included); DALI with separate driver
Material:	Natural alabaster (gypsum) diffuser, die-cast aluminium base in RAL 8022 brown/black
Mounting:	Wall mounted on the supplied mounting plate
Lifespan:	approx. 50,000 h
Warranty:	5 years (with the recommended driver)
Driver:	Phase-cut dimmable driver included; DALI driver art. 0103.200.40.1 (200 mA, 8 W)
Also:	Each piece of natural alabaster is uniquely veined; Europlug power cable 2000 mm art. 0502.075.20.0 available

VERSIONS

Reference	Dimensions	Power	Light output	Efficacy	DALI driver (optional)
6041.270.35.5	90 × 350 × 59 mm	8 W	550 lm	68.8 lm/W	0103.200.40.1 (200 mA, 8 W)

Colour: natural alabaster, base RAL 8022 brown/black. REFERENCES: 1 ref, listed per version on the product page.

Selentis Linear: een lange albasten staaf met zacht afgeronde uiteinden dat warm van binnenuit gloeit, met een LED van 2700K en een inbegrepen dimbare fase-aansnijdingsdriver.

Selentis Linear : une longue barre d'albâtre aux extrémités arrondies qui rayonne chaleureusement de l'intérieur, avec LED 2700K et driver gradable à coupure de phase inclus.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.