

Lift

66xxxx · Suspended linear LED luminaire

A customisable suspended linear LED luminaire with a very slim rectangular section and an opal diffuser, in four lengths, in white or black, with five control types.





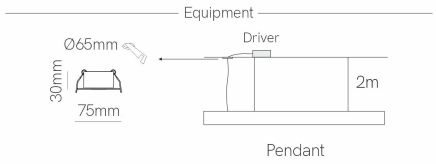

TECHNICAL DATA

Profile:	35 x 61.7 mm
Length / power:	1130 mm 33 W, 1420 mm 42 W 1700 mm 51 W, 1970 mm 59 W
Colour temperature:	2700 / 3000 / 4000 K, RGBW, 2700-5500 K
Efficacy:	150 / 155 / 160 lm/W, 100 lm/W tunable
CRI:	>90
IP rating:	IP40
Beam angle:	135° opal diffuser
Dimming:	On-Off, DALI, Push, Casambi, Tuya
Material:	Aluminium and polycarbonate
Power factor:	>0.9
Voltage:	230 VAC
Lifespan:	50,000 h L80B20

REFERENCES

152 refs All references are listed per version on the product page

Aanpasbare hangende lineaire LED-armatuur met een zeer slanke rechthoekige doorsnede en een opaal diffusor, in vier lengtes, in wit of zwart, met vijf bedieningstypes.

Luminaire LED linéaire suspendu personnalisable, à section rectangulaire très fine et diffuseur opale, en quatre longueurs, en blanc ou noir, avec cinq types de commande.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.