


GHIBLI R

KEYLIGHT recessed directional spotlight
26° standard · IP20 · adjustable · driver optional

Directional recessed downlight in die-cast aluminium with Bridgelux V8 Array light source. Available in white/black combination, black or grey finishes, with 2700K and 3000K variants, 550-801 lumen output and 5-year warranty when combined with the recommended driver.



technisch beeld

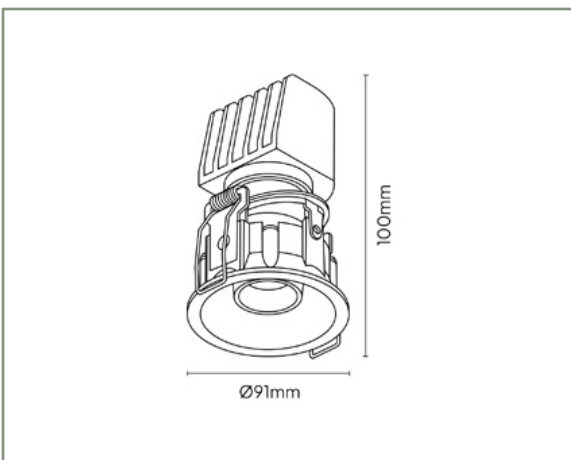

Lichtbron

Power	6.2 / 9.3 W
Voltage	External driver
Lumens	550 / 591 / 745 / 801 Lm
Light effectiveness	80-95 Lm/W
Color temperature	2700K / 3000K
CRI	>90
Beam angles	26° std. / 36° opt.
Dimmable	Driver dependent
Adjustable	0-20° / 360°
Protection index	IP20
Hours of life	50,000 h
Warranty	5 years*

Data sheet

Article numbers	4915.179 / 379 / 180 / 380
Current	350 / 500 mA
Driver	Select option, excluding driver
Colors	35 white+black / 5 black / 7 grey
Long	100 mm
Width	—
High	—
Diameter	91 mm
Cutting diameter	Hole size see driver sheet
Material	Die-cast aluminium

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be