


VENUS

KEYLIGHT surface spotlight · 10W · 24° · DTW
IP20 · phase-cut dimmable driver included · adjustable

Compact surface-mounted spotlight in die-cast aluminium with Bridgelux Dim-to-Warm light source and included phase-cut dimmable driver. VENUS combines 350° rotation and 55° tilt with a warm 1800–3000K light range, optional beam angles and a clean architectural form in white or black finishes.



technisch beeld

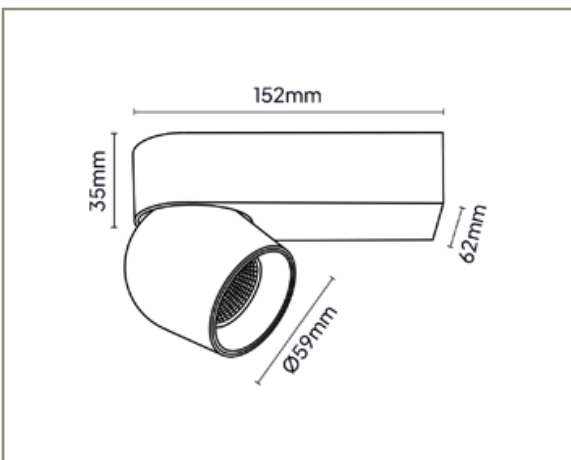

Lichtbron

Power	10 W
Voltage	Driver included
Light source	Bridgelux DtW
Lumens	900 Lm
Light effectiveness	90 Lm/W
Color temperature	1800-3000K DTW
CRI	>90
Beam angles	24° std. / 36° / 50° opt.
Dimmable	Yes, phase-cut included
Adjustable	Rotate 350° / tilt 55°
Protection index	IP20
Hours of life	50,000 h
Warranty	5 years*

Data sheet

Article number	5066.125.24.Δ
Current	250 mA
Driver	Phase-cut included / 1-10V & DALI opt.
Colors	3 white / 5 black
Diameter	59 mm
Length	152 mm
Depth	35 mm
Optional accessories	Gold ring / honeycomb
Material	Die-cast aluminium

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be