

AELA P/M

An indoor architectural-grade recessed downlight utilizing high-efficiency integrated LED technology. Designed with a robust, low-profile housing for clean aesthetic integration, the fixture utilizes a remote external driver system. This modular approach allows for precise configuration of wattage, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT) to meet specific architectural requirements.




AELA P/M

FAEPA2 - ARANCIO-BRUCIATO

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto
Source: Led Integrato
Power: 50W+10W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 3100-3200lm
Color Temperature: 3000K-4000K
Light Beam: 120° _ Biemissione
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D
Volume: 0,0369m3
Gross Weight: 6.00 Kg
Net Weight: 4.40 Kg

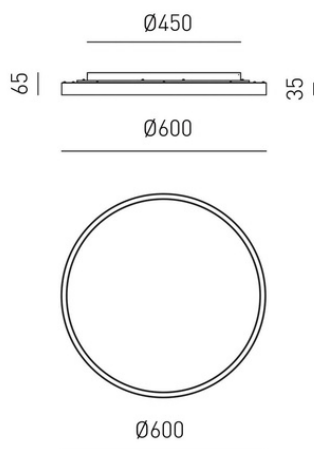

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/M

An indoor architectural-grade recessed downlight utilizing high-efficiency integrated LED technology. Designed with a robust, low-profile housing for clean aesthetic integration, the fixture utilizes a remote external driver system. This modular approach allows for precise configuration of wattage, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT) to meet specific architectural requirements.




AELA P/M

FAEPBE2 - NEW-BEIGE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto
Source: Led Integrato
Power: 50W+10W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 3100-3200lm
Color Temperature: 3000K-4000K
Light Beam: 120° _ Biemissione
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D
Volume: 0,0369m3
Gross Weight: 6.00 Kg
Net Weight: 4.40 Kg

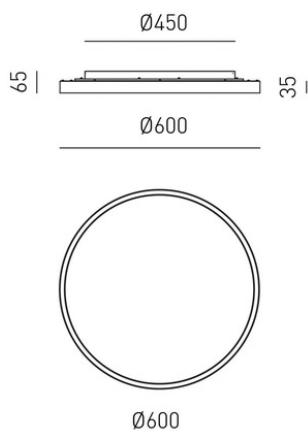

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/M

An indoor architectural-grade recessed downlight utilizing high-efficiency integrated LED technology. Designed with a robust, low-profile housing for clean aesthetic integration, the fixture utilizes a remote external driver system. This modular approach allows for precise configuration of wattage, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT) to meet specific architectural requirements.




AELA P/M

FAEPP2 - PESCA

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto
Source: Led Integrato
Power: 50W+10W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 3100-3200lm
Color Temperature: 3000K-4000K
Light Beam: 120° _ Biemissione
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D
Volume: 0,0369m3
Gross Weight: 6.00 Kg
Net Weight: 4.40 Kg

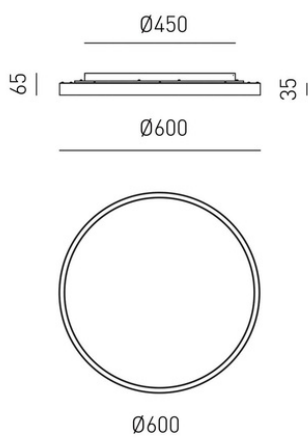

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/M

An indoor architectural-grade recessed downlight utilizing high-efficiency integrated LED technology. Designed with a robust, low-profile housing for clean aesthetic integration, the fixture utilizes a remote external driver system. This modular approach allows for precise configuration of wattage, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT) to meet specific architectural requirements.




AELA P/M

FAEPB2 - BIANCO - WHITE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto
Source: Led Integrato
Power: 50W+10W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 3100-3200lm
Color Temperature: 3000K-4000K
Light Beam: 120° _ Biemissione
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D
Volume: 0,0369m3
Gross Weight: 6.00 Kg
Net Weight: 4.40 Kg

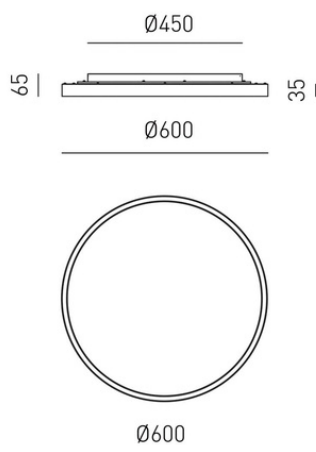

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/M

An indoor architectural-grade recessed downlight utilizing high-efficiency integrated LED technology. Designed with a robust, low-profile housing for clean aesthetic integration, the fixture utilizes a remote external driver system. This modular approach allows for precise configuration of wattage, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT) to meet specific architectural requirements.



AELA P/M

FAEPN2 - NERO - BLACK

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0369m3

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

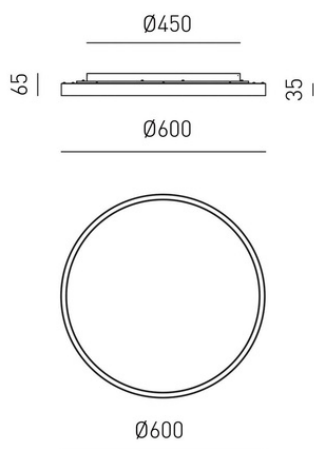

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/M

An indoor architectural-grade recessed downlight utilizing high-efficiency integrated LED technology. Designed with a robust, low-profile housing for clean aesthetic integration, the fixture utilizes a remote external driver system. This modular approach allows for precise configuration of wattage, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT) to meet specific architectural requirements.




AELA P/M

FAEPO2 - ORO - GOLD

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto
Source: Led Integrato
Power: 50W+10W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 3100-3200lm
Color Temperature: 3000K-4000K
Light Beam: 120° _ Biemissione
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D
Volume: 0,0369m³
Gross Weight: 6.00 Kg
Net Weight: 4.40 Kg

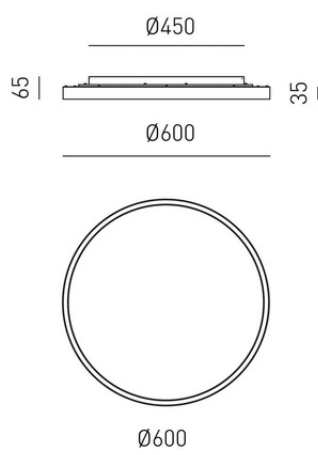

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be