


# ATIA P/M

An interior-grade, recessed downlight luminaire engineered with integrated LED technology. Constructed for seamless ceiling deployment, it features a low-profile housing designed for indoor environments. The architectural system operates via a remote external driver, enabling custom configuration of power ratings, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT).

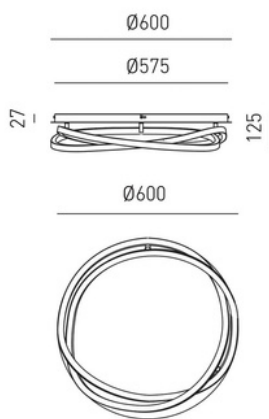

## ATIA P/M

FATPB2-BIANCO-WHITE

### TECHNICAL DATA

Installation: Interno \_ Lampada a soffitto  
Source: Led Integrato  
Power: 50W  
Power Supply: 220-240V AC \_ 50/60Hz  
Dimming: Dimmerabile \_ taglio fase+push non incl.  
Lumen: 2800lm  
Color Temperature: 3000K  
Light Beam: 260° \_ Diffusa  
CRI: >80  
Lifespan: 30.000h  
IP Rating: IP20  
Insulation Class: I  
Gross Weight: 6.20 Kg  
Net Weight: 4.10 Kg

*Montatura in alluminio satinato bianco. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).*

*White satin-finish aluminium mount. White opal silicone diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).*

*Monture en aluminium blanc satiné . Diffuseur en silicone opale blanc. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).*

*Weißer satiniertes Aluminiumrahmen. Weißer opaler Silikondiffusor. Phase-Cut dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).*

### Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

[www.formaluna.be](http://www.formaluna.be)

# ATIA P/M

An interior-grade, recessed downlight luminaire engineered with integrated LED technology. Constructed for seamless ceiling deployment, it features a low-profile housing designed for indoor environments. The architectural system operates via a remote external driver, enabling custom configuration of power ratings, beam angles, color rendering indexes (CRI), and correlated color temperatures (CCT).



## ATIA P/M

FATPN2-NERO-BLACK

### TECHNICAL DATA

Installation: Interno \_ Lampada a soffitto

Source: Led Integrato

Power: 50W

Power Supply: 220-240V AC \_ 50/60Hz

Dimming: Dimmerabile \_ taglio fase+push non incl.

Lumen: 2600lm

Color Temperature: 3000K

Light Beam: 260° \_ Diffusa

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 6.20 Kg


Net Weight: 4.10 Kg

*Montatura in alluminio satinato nero. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).*

*Black satin finish aluminium mount. White opal silicone diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).*

*Monture en aluminium noir satiné. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).*

*Schwarzer satiniertes Aluminiumrahmen. Opal Weißer Silikon Diffusor. Phase-Cut dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).*

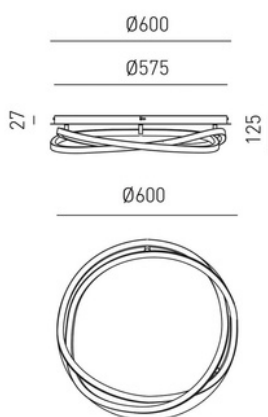

### Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

[www.formaluna.be](http://www.formaluna.be)