


ATIA S/G

An indoor professional-grade recessed downlight luminaire engineered with high-efficiency integrated LED components. Featuring a low-profile housing designed for seamless architectural ceiling integration, the optical framework delivers optimized, low-glare illumination. The system relies on a remote external driver arrangement, enabling precise, modular configuration of operating wattage, beam spreads, color rendering index options (CRI), and correlated color temperatures (CCT).

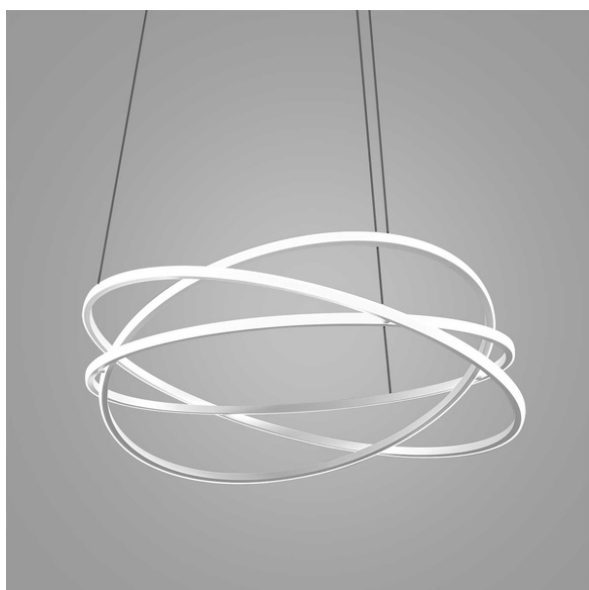

ATIA S/G

FATSB3-BIANCO-WHITE

TECHNICAL DATA


Installation: Interno _ Lampada a sospensione
Source: Led Integrato
Power: 120W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 9500lm
Color Temperature: 3000K
Light Beam: 360° _ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 10.00 Kg
Net Weight: 5.50 Kg

Montatura in alluminio satinato bianco. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

White satin-finish aluminium mount. White opal silicone diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium blanc satiné. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).

Weißer satiniertes Aluminiumrahmen. Opal Weißer Silikon Diffusor. Phase-Cut dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

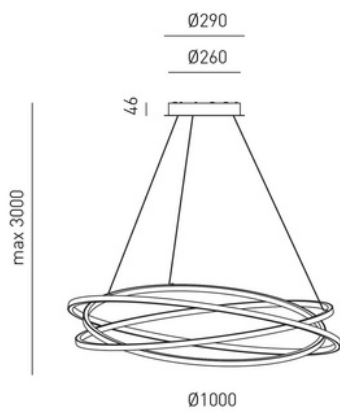

Disclaimer


Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

ATIA S/G

An indoor professional-grade recessed downlight luminaire engineered with high-efficiency integrated LED components. Featuring a low-profile housing designed for seamless architectural ceiling integration, the optical framework delivers optimized, low-glare illumination. The system relies on a remote external driver arrangement, enabling precise, modular configuration of operating wattage, beam spreads, color rendering index options (CRI), and correlated color temperatures (CCT).

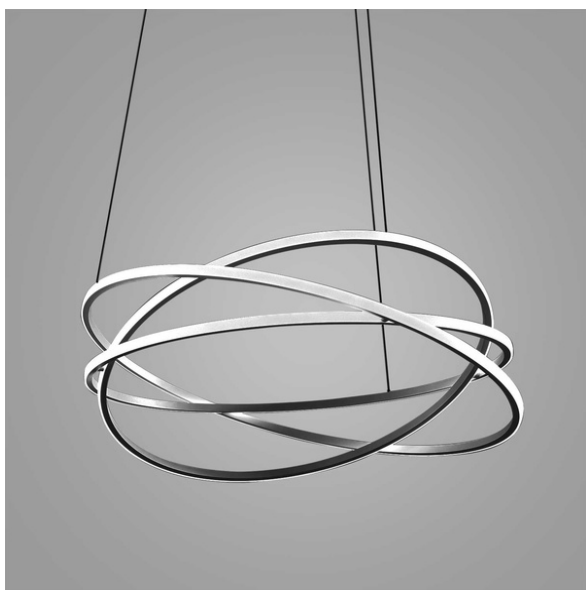

ATIA S/G

FATSN3 - NERO - BLACK

TECHNICAL DATA


Installation: Interno _ Lampada a sospensione
Source: Led Integrato
Power: 120W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 9300lm
Color Temperature: 3000K
Light Beam: 360° _ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 10.00 Kg
Net Weight: 5.50 Kg

Montatura in alluminio satinato nero. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Black satin finish aluminium mount. White opal silicone diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium noir satiné. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).

Schwarzer satiniertes Aluminiumrahmen. Opal Weißer Silikon Diffusor. Phase-Cut dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

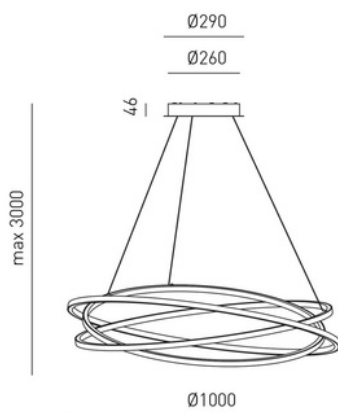

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be