

ATIA S/M

An indoor architectural-grade recessed downlight luminaire optimized with high-efficiency integrated LED components. Engineered with a durable, compact frame designed for flush ceiling integration, the optical framework delivers precise, glare-controlled illumination. The system requires an external remote driver setup, allowing customized adjustments for operating wattage, color rendering indices, beam angles, and correlated color temperatures (CCT).



ATIA S/M

FATSB2-BIANCO-WHITE

TECHNICAL DATA


Installation: Interno _ Lampada a sospensione
Source: Led Integrato
Power: 100W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 7500lm
Color Temperature: 3000K
Light Beam: 360° _ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 7.40 Kg
Net Weight: 4.75 Kg

Montatura in alluminio satinato bianco. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

White satin-finish aluminium mount. White opal silicone diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium blanc satiné. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).

Weißer satiniertes Aluminiumrahmen. Opal Weißer Silikon Diffusor. Phase-Cut dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

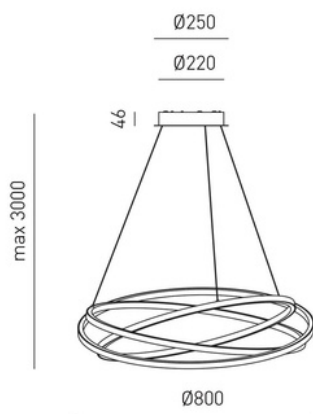

Disclaimer


Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

ATIA S/M

An indoor architectural-grade recessed downlight luminaire optimized with high-efficiency integrated LED components. Engineered with a durable, compact frame designed for flush ceiling integration, the optical framework delivers precise, glare-controlled illumination. The system requires an external remote driver setup, allowing customized adjustments for operating wattage, color rendering indices, beam angles, and correlated color temperatures (CCT).

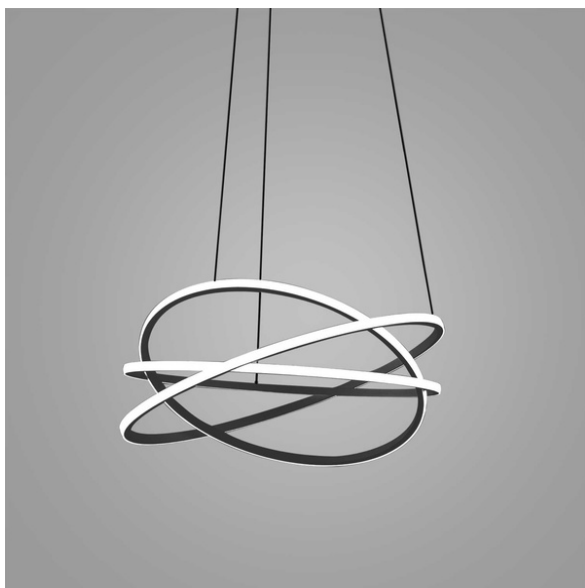

ATIA S/M

FATSN2 - NERO - BLACK

TECHNICAL DATA

Installation: Interno _ Lampada a sospensione

Source: Led Integrato

Power: 100W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 7300lm

Color Temperature: 3000K

Light Beam: 360° _ Diffusa

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 7.40 Kg


Net Weight: 4.75 Kg

Montatura in alluminio satinato nero. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Black satin finish aluminium mount. White opal silicone diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium noir satiné. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).

Schwarzer satinierter Aluminiumrahmen. Opal Weißer Silikon Diffusor. Phase-Cut dimmbare LED-Lichtquelle über externen Dimmer+Push (nicht enthalten).

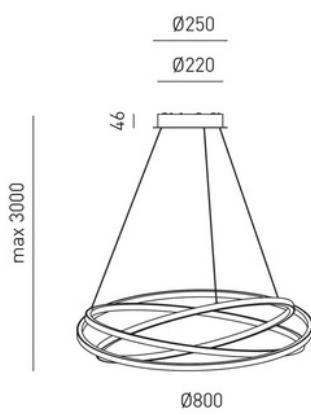

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be