
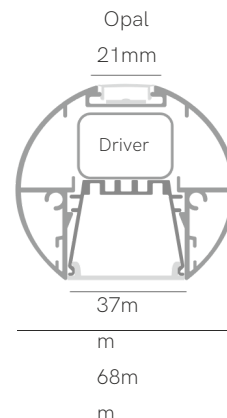


DUMI DUAL

Suspended direct-indirect LED luminaire delivering up to 15,722lm, CRI ≥ 95 , UGR<19, IP40 protection, multiple optics, smart control options, and configurable lengths from 1170mm to 2020mm.

Dumi dual

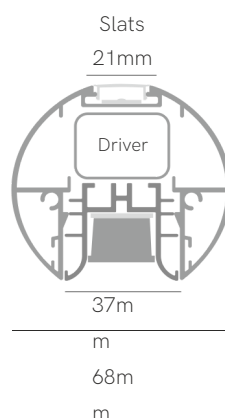

*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories:  page 327  pages 326-333

Technical Information


Power	44-51W / 54-63W / 66-76W / 76-97W
Lumens	4.004 lm - 13.192 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Down Rigid / Up Flex

Colour

	White (9003)	1
	Black (9005)	2
	Gray (7037)	3
	Green (6018)	4
	Orange (2009)	5
	Red (3020)	6
	Violet (4008)	7
	Pastel blue (5024)	8
	Light blue (5012)	9
	Custom RAL	

Code	Di user (Angle)	Size (Power)	UGR & Opal/Black slats	CCT (lm/W)	Driver
Code D	UGR (78°) P	1.170mm (44/51W)	3	2.700K (91-112 lm/W)	2
	Opal (112°) W	1.450mm (54/63W)	4	3.000K (96-128 lm/W)	3
	Black slats (60°) N	1.730mm (66/76W)	5	4.000K (103-136 lm/W)	4
		2.020mm (76/97W)	6	2.700-5.500K (95-105 lm/W)	7
			9		

Code: **D** 



 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be