


DUMI

Suspended linear LED luminaire delivering up to 10,064lm, CRI ≥ 95 , UGR<19, IP40 protection, multiple optics, TRIAC/Casambi/Tuya control, and configurable lengths from 1170mm to 2020mm.

Dumi

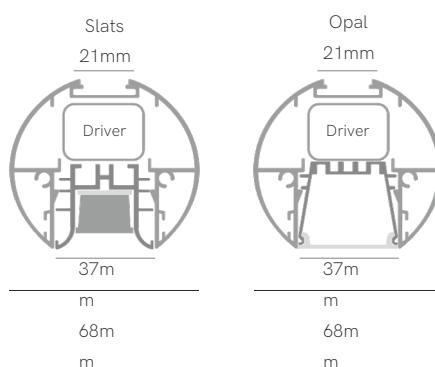

*Finished luminaire. Includes suspension kit and textile power cable.


Control accessories: page 327 pages 326-333

Technical Information

Power	31-38W / 38-47W / 46-56W / 53-74W
Lumens	2.821 lm - 10.064 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Di user (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code D	UGR (78°) 3	UGR & Opal/Black slats	2.700K (91-112 lm/W) 2	On / O 1	White (9003) 1
	Opal (112°) 5	1.170mm (31/38W) 3	3.000K (96-128 lm/W) 3	Triac 4	Black (9005) 2
	Black slats (60°) 9	1.450mm (38/47W) 4	4.000K (103-136 lm/W) 4	Casambi 5	Gray (7037) 3
		1.730mm (46/56W) 5	2.700-5.500K (95-105 lm/W) 9	Tuya 7	Green (6018) 4
		2.020mm (53/74W) 6			Orange (2009) 5
					Red (3020) 6
					Violet (4008) 7
					Pastel blue (5024) 8
					Light blue (5012) 9
					Custom RAL 10

Code: **D**



Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be