

# JULIETTE S

Featuring a 50W integrated LED delivering 2200 lumens at 3000K, this IP20 fixture supports phase-cut dimming. Constructed with a satin aluminum frame and an opal silicone diffuser for seamless output.



## JULIETTE S

FJUSB1 - BIANCO - WHITE

### TECHNICAL DATA


Installation: Interno \_ Lampada a sospensione  
Source: Led integrato  
Power: 50W  
Power Supply: 220-240V AC \_ 50/60Hz  
Dimming: Dimmerabile \_ taglio fase+push non incl.  
Lumen: 2300lm  
Color Temperature: 3000K  
Light Beam: 120° \_ Diretta  
CRI: >80  
Lifespan: 30.000h  
IP Rating: IP20  
Insulation Class: I  
Gross Weight: 4.20 Kg  
Net Weight: 2.90 Kg

*Montatura in alluminio satinato bianco. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).*

*White satin finish aluminium frame. White opal silicone diffuser. Dimmable LED light source phase cut via an external dimmer+push (not included).*

*Monture en aluminium blanc satiné. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).*

*Weißer satiniertes Aluminiumrahmen. Weißer opaler Silikondiffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer+Push (nicht enthalten).*

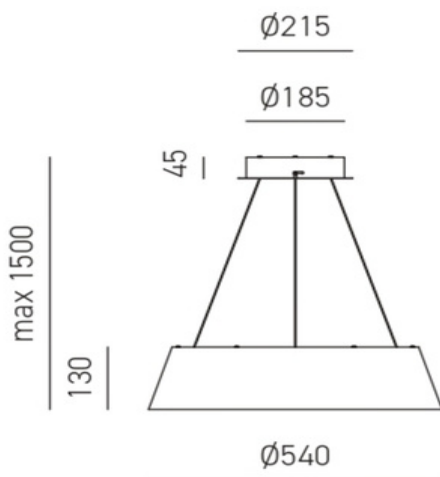

### Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

[www.formaluna.be](http://www.formaluna.be)

# JULIETTE S

Featuring a 50W integrated LED delivering 2200 lumens at 3000K, this IP20 fixture supports phase-cut dimming. Constructed with a satin aluminum frame and an opal silicone diffuser for seamless output.



## JULIETTE S

FJUSN1 - NEROORO

### TECHNICAL DATA


Installation: Interno \_ Lampada a sospensione  
Source: Led integrato  
Power: 50W  
Power Supply: 220-240V AC \_ 50/60Hz  
Dimming: Dimmerabile \_ taglio fase+push non incl.  
Lumen: 2200lm  
Color Temperature: 3000K  
Light Beam: 120° \_ Diretta  
CRI: >80  
Lifespan: 30.000h  
IP Rating: IP20  
Insulation Class: I  
Gross Weight: 4.20 Kg  
Net Weight: 2.90 Kg

*Montatura in alluminio satinato nero con interno oro spazzolato. Diffusore in silicone bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).*

*Black satin finish aluminium frame with internal brushed gold surface. White opal silicone diffuser. Dimmable LED light source phase cut via an external dimmer+push (not included).*

*Monture en aluminium noir satiné avec intérieur en or brossé. Diffuseur en silicone blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe+poussoir (pas inclus).*

*Schwarzer satiniertes Aluminiumrahmen mit gebürsteter goldener Innenseite. Opalweißer Silikondiffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer+Push (nicht enthalten).*

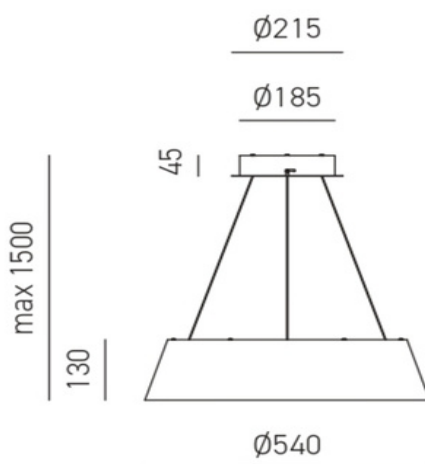

### Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

[www.formaluna.be](http://www.formaluna.be)