
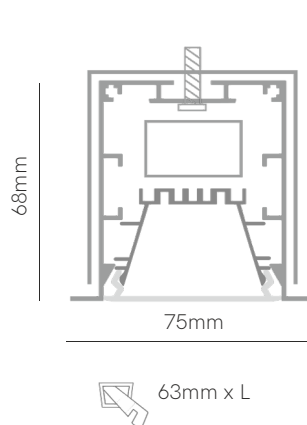


URBAN E

Operating at 230VAC, this IP40 recessed LED features outputs from 46W to 103W. It delivers up to 136 lm/W efficacy, multiple CCTs, and Casambi, DALI, or Tuya dimming support.

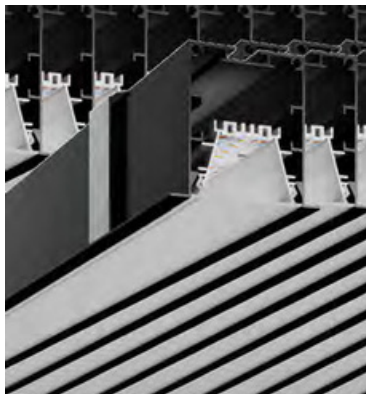

Driver

Control accessories pages 282-289.

*Spring clips included.

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5.152 lm - 14.008 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid

Code	Di user (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 3	UGR (78°) 4	1.130m 3	2.700K (112 lm/W) - 40W/m 2	On / O 1	☐ White (9003) 1
	Opal (112°) 5	m 4	3.000K (128 lm/W) - 40W/m 3	Dali 2	☒ Black (9005) 2
		1.410m 5	4.000K (136 lm/W) - 40W/m 4	Push 3	☐ Gray (9006) 3
		m 6	5.000K (136 lm/W) - 40W/m 5	Casambi 5	☒ Custom RAL C
		1.690m 7	5.500K (105 lm/W) - 40W/m 9	Tuya 7	☒ Electrolytic Plating
		m			
		1.970m			
		m			
		2.530m			
		m			

Code: **3** ☐ ☐ ☐ ☐ ☐ ☐

ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

Accessories




End caps
40731
40732 4
40733



Joint 180°
40220



Joint 90°
40550



Accessories pages 158-159.

5 YEARS
WARRANTY

50.000
HOURS

IP
40

UGR
<19

230
VAC

PF
>0,9

CRI
≥95



3,37m
Max



Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be