

Neo Sensor

8An outdoor IP54-rated architectural wall luminaire featuring integrated high-efficiency LED technology paired with a built-in PIR motion and twilight sensor for automated illumination. Designed with a clean, tilted silhouette, it delivers downward-projected light ideal for entrances, pathways, and facades. The fixture incorporates a versatile CCT switch allowing selection between 2200K, 2700K, and 3000K color temperatures, ensuring optimized efficiency, safety, and modern exterior aesthetic integration.

Neo

NEO9WWALL 120° CCT SWITCH 2200K/2700K/3000K MATT WHITE

Reference 5560

Category Outdoor wall lights

PRODUCT


Housing material	ALUMINUM
Colour / Finishes	MATT WHITE
Power (W)	9 W
Luminous flux (lm)	680
Efficacy (lm/W)	76
Beam angle (°)	120

LIGHT SOURCE

Colour temperature (K)	2200-2700-3000K
Colour temperature selector	CCT SWITCH
Chromatic stability (SDCM)	SDCM3
Protection (tP)	IP54
Protection (tK)	IK08
Power factor	>0,9
Lifespan (h)	25000
Warranty (years)	3
Energy label	G
Diffuser material	PC
Control	ON/OFF

ELECTRICAL DATA

Input voltage	220/240
Maximum current (A)	0,04
Driver in/out	100240 AC
Frequency (Hz)	50/60Hz
Insulation class	CLASS I

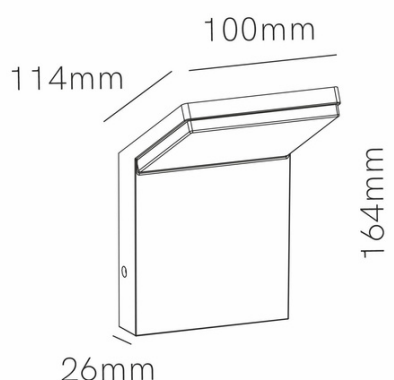

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

Neo Sensor

8An outdoor IP54-rated architectural wall luminaire featuring integrated high-efficiency LED technology paired with a built-in PIR motion and twilight sensor for automated illumination. Designed with a clean, tilted silhouette, it delivers downward-projected light ideal for entrances, pathways, and facades. The fixture incorporates a versatile CCT switch allowing selection between 2200K, 2700K, and 3000K color temperatures, ensuring optimized efficiency, safety, and modern exterior aesthetic integration.

Neo

NEO9WWALL 120° CCT SWITCH 2200K/2700K/3000K MATT BLACK

Reference 5561

Category Outdoor wall lights

PRODUCT


Housing material	ALUMINUM
Colour / Finishes	MATT BLACK
Power (W)	9 W
Luminous flux (lm)	680
Efficacy (lm/W)	76
Beam angle (°)	120

LIGHT SOURCE

Colour temperature (K)	2200-2700-3000K
Colour temperature selector	CCT SWITCH
Chromatic stability (SDCM)	SDCM3
Protection (IP)	IP54
Protection (IK)	IK08
Power factor	>0,9
Lifespan (h)	25000
Warranty (years)	3
Energy label	G
Diffuser-material	PC
Control	ON/OFF

ELECTRICAL DATA

Input voltage	220/240
Maximum current (A)	0,04
Driver in/out	100240 AC
Frequency (Hz)	50/60Hz
Insulation class	CLASS I

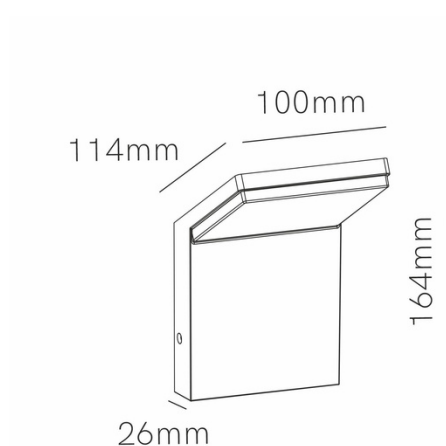

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be