

AELA P/P

An architectural-grade, ultra-compact recessed downlight luminaire utilizing high-performance integrated LED technology. Built with a low-profile, robust frame tailored for flush ceiling mounting in indoor settings, it delivers clean, controlled optical output. Operating via a remote external driver architecture, it allows flexible configuration across power levels, beam spreads, color rendering indices (CRI), and correlated color temperatures (CCT) to satisfy demanding lighting design requirements.



FAEPB1-BIANCO-WHITE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 30W+6W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1800-1900lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0174m3

Gross Weight: 3.10 Kg

Net Weight: 2.30 Kg

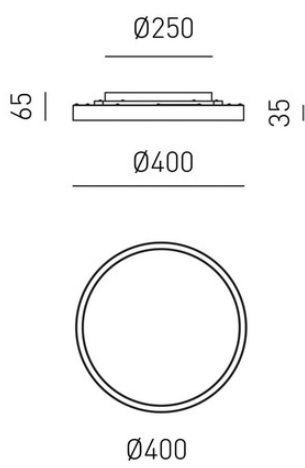

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


AELA P/P

An architectural-grade, ultra-compact recessed downlight luminaire utilizing high-performance integrated LED technology. Built with a low-profile, robust frame tailored for flush ceiling mounting in indoor settings, it delivers clean, controlled optical output. Operating via a remote external driver architecture, it allows flexible configuration across power levels, beam spreads, color rendering indices (CRI), and correlated color temperatures (CCT) to satisfy demanding lighting design requirements.



TECHNICAL DATA

Installation: Interno _ Lampada a soffitto
Source: Led Integrato
Power: 30W+6W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 1800-1900lm
Color Temperature: 3000K-4000K
Light Beam: 120° _ Biemissione
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D
Volume: 0,0174m3
Gross Weight: 3.10 Kg
Net Weight: 2.30 Kg

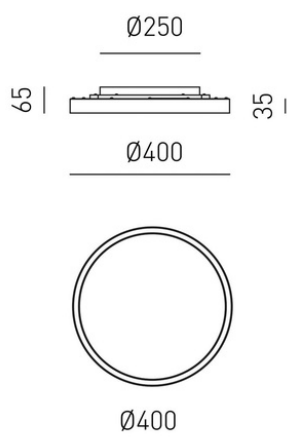

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/P

An architectural-grade, ultra-compact recessed downlight luminaire utilizing high-performance integrated LED technology. Built with a low-profile, robust frame tailored for flush ceiling mounting in indoor settings, it delivers clean, controlled optical output. Operating via a remote external driver architecture, it allows flexible configuration across power levels, beam spreads, color rendering indices (CRI), and correlated color temperatures (CCT) to satisfy demanding lighting design requirements.



FAEPO1-ORO-GOLD

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 30W+6W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1800-1900lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0174m3

Gross Weight: 3.10 Kg

Net Weight: 2.30 Kg

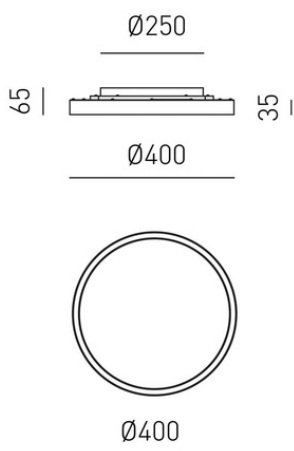

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/P

An architectural-grade, ultra-compact recessed downlight luminaire utilizing high-performance integrated LED technology. Built with a low-profile, robust frame tailored for flush ceiling mounting in indoor settings, it delivers clean, controlled optical output. Operating via a remote external driver architecture, it allows flexible configuration across power levels, beam spreads, color rendering indices (CRI), and correlated color temperatures (CCT) to satisfy demanding lighting design requirements.



AELA P/P

FAEPA1-ARANCIO-BRUCIATO

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 30W+6W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1800-1900lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0174m3

Gross Weight: 3.10 Kg

Net Weight: 2.30 Kg

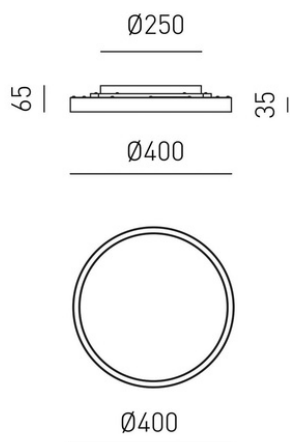

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/P

An architectural-grade, ultra-compact recessed downlight luminaire utilizing high-performance integrated LED technology. Built with a low-profile, robust frame tailored for flush ceiling mounting in indoor settings, it delivers clean, controlled optical output. Operating via a remote external driver architecture, it allows flexible configuration across power levels, beam spreads, color rendering indices (CRI), and correlated color temperatures (CCT) to satisfy demanding lighting design requirements.



AELA P/P

FAEPBE1-NEW-BEIGE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 30W+6W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1800-1900lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0174m3

Gross Weight: 3.10 Kg

Net Weight: 2.30 Kg

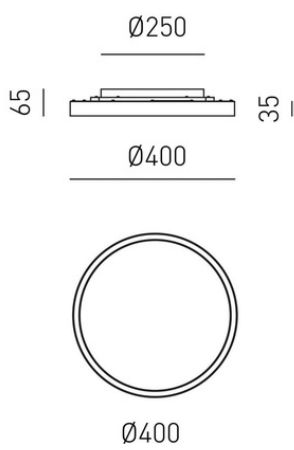

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

AELA P/P

An architectural-grade, ultra-compact recessed downlight luminaire utilizing high-performance integrated LED technology. Built with a low-profile, robust frame tailored for flush ceiling mounting in indoor settings, it delivers clean, controlled optical output. Operating via a remote external driver architecture, it allows flexible configuration across power levels, beam spreads, color rendering indices (CRI), and correlated color temperatures (CCT) to satisfy demanding lighting design requirements.



TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 30W+6W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1800-1900lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0174m3

Gross Weight: 3.10 Kg

Net Weight: 2.30 Kg

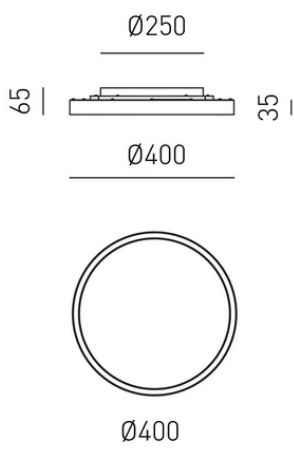

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be