

Bento Surface 3 Leds

An architectural-grade surface-mounted ceiling luminaire utilizing integrated high-performance LED technology. Delivering 6.1W of power with an efficacy of 106.7 lm/W, it provides 651 lumens at a 2700K warm-white color temperature with a high CRI of 92 and a 47° beam angle. Designed with a low glare rating (UGR $\leq$ 16) and an IP23 protection rating, it includes replaceable LED and driver options for sustainable, long-term performance in modern commercial and residential environments.

Technical features

Luminaire total power: 6.1W
Real lumens: 651
Real lm/W: 107
Correlated Colour Temperature (CCT): 2700K
Lens / reflector angle: FLOOD47°
UGR: $\leq$ 16
Structure material: Aluminium, Polycarbonate
Structure finish: Black
Equipment necessary but not included
Voltage / frequency: 9VDC/max.700mA
Useful life: 50,000h L80B20
Warranty: 5years



Luminotechnic features



Luminance C0°G65°: 97
Luminance C90°G65°: 62
CRI: 92
MacAdam steps: 3
Photobiological risk: RG1

UGR	
S=0.350	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.3
Room dimensions: X=64, Y=64	
UGR crosswise	13.5
UGR lengthwise	14.7

Lampholder	Quantity	Light source power (W)	Correlated Colour temperature (CCT)
LED	1	6.1W	2700K

Logistics

 x 100
Net weight (kg): 0.22
Packaged weight (kg): 0.24
Packaging: 95mmx45mm x 95mm

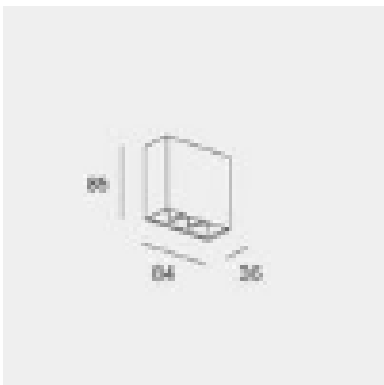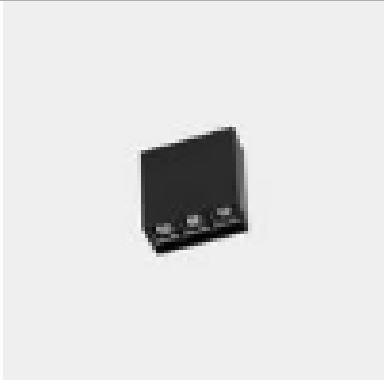

Disclaimer
Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be