

# ZERO-DUO

A large-format decorative suspension luminaire composed of two concentric aluminum rings (Ø400+700 mm, Ø700+1000 mm, or Ø1000+1500 mm) suspended from a single central ceiling rose. Delivering 78W to 180W with luminous outputs up to 16,200 lumens and an IP20 rating, the luminaire features an opal diffuser casting a 100° beam angle with CRI >80. It supports fixed CCTs (2700K, 3000K, 4000K) as well as tunable white (2700-5500K), integrated with versatile control protocols including On/Off, DALI/Push, Casambi, and Tuya Smart for tailored commercial, hospitality, and residential architectural schemes.

## Zero D

ZEROD400+700 mm 78 W OPAL 100° 2700K ON/OFF MATT WHITE

**Reference** ZD1211

**Category** Custom lighting

### PRODUCT

|                    |          |
|--------------------|----------|
| Housing material   | ALUMINUM |
| Custom RAL         | Yes      |
| Power (W)          | 78 W     |
| Luminous flux (lm) | 5850     |
| Efficacy (lm/W)    | 75       |
| Beam angle (°)     | 100      |

### LIGHT SOURCE


|                            |        |
|----------------------------|--------|
| LED type                   | SMD    |
| Colour temperature (K)     | 2700K  |
| Chromatic stability (SDCM) | SDCM3  |
| UGR                        | >22    |
| Protection (IP)            | IP20   |
| Protection (IK)            | IK04   |
| Power factor               | >0,9   |
| Lifespan (h)               | 50000  |
| Warranty (years)           | 5      |
| Energy label               | G      |
| Control                    | ON/OFF |

### ELECTRICAL DATA

|                     |         |
|---------------------|---------|
| Input voltage       | 220/240 |
| Maximum current (A) | 0,35    |
| Insulation class    | CLASS I |

### MOUNTING DATA

|                    |       |
|--------------------|-------|
| LED strip cut (mm) | 2,45  |
| PCB width (mm)     | 1.998 |

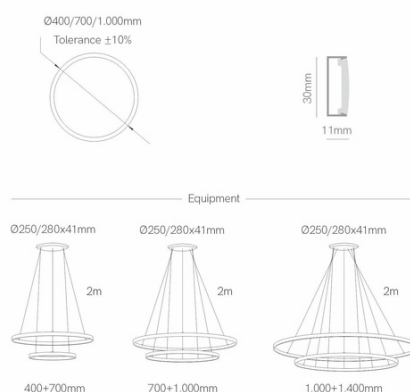

#### Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

[www.formaluna.be](http://www.formaluna.be)

# ZERO-DUO

A large-format decorative suspension luminaire composed of two concentric aluminum rings (Ø400+700 mm, Ø700+1000 mm, or Ø1000+1500 mm) suspended from a single central ceiling rose. Delivering 78W to 180W with luminous outputs up to 16,200 lumens and an IP20 rating, the luminaire features an opal diffuser casting a 100° beam angle with CRI >80. It supports fixed CCTs (2700K, 3000K, 4000K) as well as tunable white (2700–5500K), integrated with versatile control protocols including On/Off, DALI/Push, Casambi, and Tuya Smart for tailored commercial, hospitality, and residential architectural schemes.

## Zero D

ZEROD400+700 mm 78 W OPAL 100° 2700K ON/OFF MATT BLACK

**Reference** ZD1212

**Category** Custom lighting

### PRODUCT

|                    |          |
|--------------------|----------|
| Housing material   | ALUMINUM |
| Custom RAL         | Yes      |
| Power (W)          | 78 W     |
| Luminous flux (lm) | 5850     |
| Efficacy (lm/W)    | 75       |
| Beam angle (°)     | 100      |

### LIGHT SOURCE


|                            |        |
|----------------------------|--------|
| LED type                   | SMD    |
| Colour temperature (K)     | 2700K  |
| Chromatic stability (SDCM) | SDCM3  |
| UGR                        | >22    |
| Protection (IP)            | IP20   |
| Protection (IK)            | IK04   |
| Power factor               | >0,9   |
| Lifespan (h)               | 50000  |
| Warranty (years)           | 5      |
| Energy label               | G      |
| Control                    | ON/OFF |

### ELECTRICAL DATA

|                     |         |
|---------------------|---------|
| Input voltage       | 220/240 |
| Maximum current (A) | 0,35    |
| Insulation class    | CLASS I |

### MOUNTING DATA

|                    |       |
|--------------------|-------|
| LED strip cut (mm) | 2,45  |
| PCB width (mm)     | 1.998 |

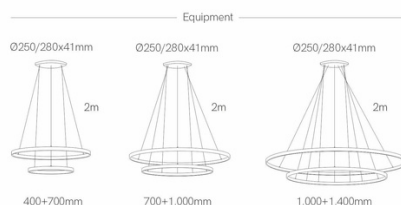

#### Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

[www.formaluna.be](http://www.formaluna.be)