


GFA - 6W

A low-voltage magnetic track spotlight engineered for 48V DC slim track systems. Constructed from extruded aluminum in an anodized champagne finish, it integrates a 6W LED module delivering 420 lumens at 3000K with CRI >90 and a 30° beam spread. Class III and IP20 rated, the fixture features tool-free magnetic mechanical insertion and requires a remote 48V DC power supply, making it ideal for flexible accent lighting in residential, commercial, and retail applications.



TECHNICAL DATA:

Power: 6W
Lumen: 420Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00010m3
Gross Weight: 0.18 Kg
Net Weight: 0.14 Kg

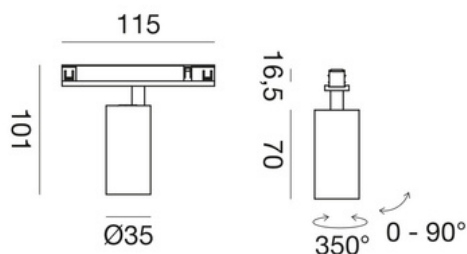

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 6W

A low-voltage magnetic track spotlight engineered for 48V DC slim track systems. Constructed from extruded aluminum in an anodized champagne finish, it integrates a 6W LED module delivering 420 lumens at 3000K with CRI >90 and a 30° beam spread. Class III and IP20 rated, the fixture features tool-free magnetic mechanical insertion and requires a remote 48V DC power supply, making it ideal for flexible accent lighting in residential, commercial, and retail applications.



TECHNICAL DATA:

Power: 6W
Lumen: 395Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00010m3
Gross Weight: 0.18 Kg
Net Weight: 0.14 Kg

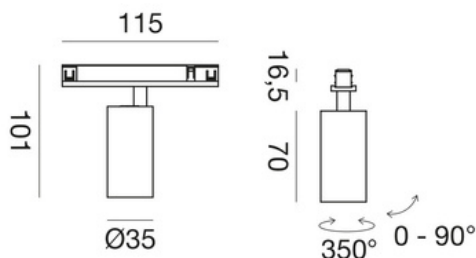

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

GFA - 6W


A low-voltage magnetic track spotlight engineered for 48V DC slim track systems. Constructed from extruded aluminum in an anodized champagne finish, it integrates a 6W LED module delivering 420 lumens at 3000K with CRI >90 and a 30° beam spread. Class III and IP20 rated, the fixture features tool-free magnetic mechanical insertion and requires a remote 48V DC power supply, making it ideal for flexible accent lighting in residential, commercial, and retail applications.

GFA1792



TECHNICAL DATA:

Power: 6W
Lumen: 420Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00010m3
Gross Weight: 0.18 Kg
Net Weight: 0.14 Kg

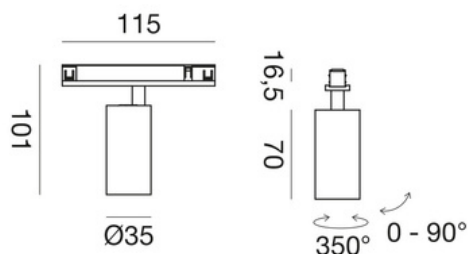

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 6W

A low-voltage magnetic track spotlight engineered for 48V DC slim track systems. Constructed from extruded aluminum in an anodized champagne finish, it integrates a 6W LED module delivering 420 lumens at 3000K with CRI >90 and a 30° beam spread. Class III and IP20 rated, the fixture features tool-free magnetic mechanical insertion and requires a remote 48V DC power supply, making it ideal for flexible accent lighting in residential, commercial, and retail applications.



TECHNICAL DATA:

Power: 6W
Lumen: 420Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00010m3
Gross Weight: 0.18 Kg
Net Weight: 0.14 Kg

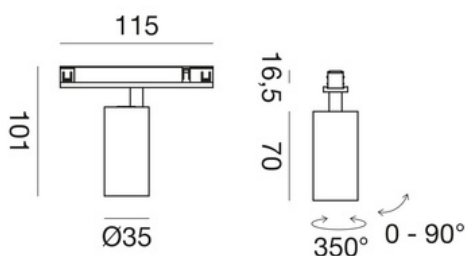

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 6W

A low-voltage magnetic track spotlight engineered for 48V DC slim track systems. Constructed from extruded aluminum in an anodized champagne finish, it integrates a 6W LED module delivering 420 lumens at 3000K with CRI >90 and a 30° beam spread. Class III and IP20 rated, the fixture features tool-free magnetic mechanical insertion and requires a remote 48V DC power supply, making it ideal for flexible accent lighting in residential, commercial, and retail applications.



TECHNICAL DATA:

Power: 6W
Lumen: 420Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00010m3
Gross Weight: 0.18 Kg
Net Weight: 0.14 Kg

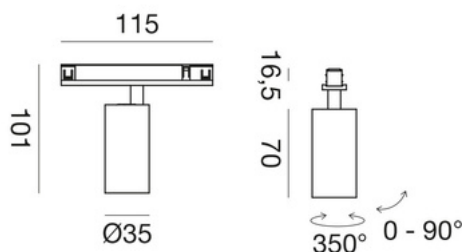

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

GFA - 6W


A low-voltage magnetic track spotlight engineered for 48V DC slim track systems. Constructed from extruded aluminum in an anodized champagne finish, it integrates a 6W LED module delivering 420 lumens at 3000K with CRI >90 and a 30° beam spread. Class III and IP20 rated, the fixture features tool-free magnetic mechanical insertion and requires a remote 48V DC power supply, making it ideal for flexible accent lighting in residential, commercial, and retail applications.

GFA1795



TECHNICAL DATA:

Power: 6W
Lumen: 420Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00010m3
Gross Weight: 0.18 Kg
Net Weight: 0.14 Kg

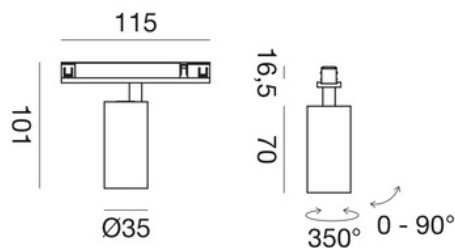

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be