


GFA - 8W

An indoor architectural luminaire engineered for integration into 48V low-voltage magnetic track systems. Featuring a clean, robust housing with adjustable optical orientation, it utilizes a high-efficiency integrated LED module with CRI >90 for superior color fidelity. Operating via tool-free magnetic mounting powered by a remote 48V DC driver, it provides flexible, glare-controlled accent lighting suited for sophisticated retail, hospitality, and residential environments.



TECHNICAL DATA:

Power: 8W
Lumen: 550Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00012m3
Gross Weight: 0.21 Kg
Net Weight: 0.15 Kg

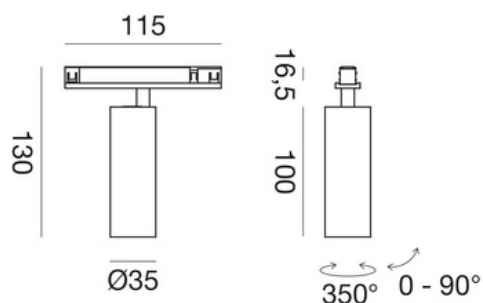

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 8W

An indoor architectural luminaire engineered for integration into 48V low-voltage magnetic track systems. Featuring a clean, robust housing with adjustable optical orientation, it utilizes a high-efficiency integrated LED module with CRI >90 for superior color fidelity. Operating via tool-free magnetic mounting powered by a remote 48V DC driver, it provides flexible, glare-controlled accent lighting suited for sophisticated retail, hospitality, and residential environments.



TECHNICAL DATA:

Power: 8W
Lumen: 515Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00012m3
Gross Weight: 0.21 Kg
Net Weight: 0.15 Kg

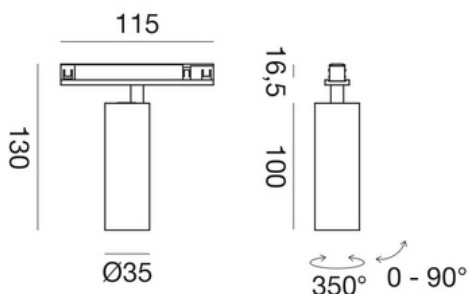

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 8W

An indoor architectural luminaire engineered for integration into 48V low-voltage magnetic track systems. Featuring a clean, robust housing with adjustable optical orientation, it utilizes a high-efficiency integrated LED module with CRI >90 for superior color fidelity. Operating via tool-free magnetic mounting powered by a remote 48V DC driver, it provides flexible, glare-controlled accent lighting suited for sophisticated retail, hospitality, and residential environments.



TECHNICAL DATA:

Power: 8W
Lumen: 550Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00012m3
Gross Weight: 0.21 Kg
Net Weight: 0.15 Kg

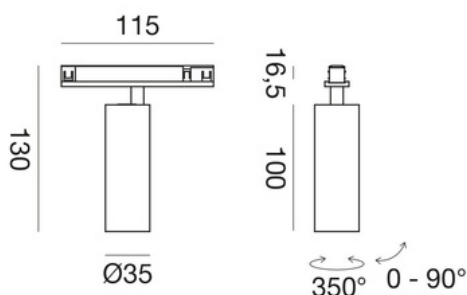

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 8W

An indoor architectural luminaire engineered for integration into 48V low-voltage magnetic track systems. Featuring a clean, robust housing with adjustable optical orientation, it utilizes a high-efficiency integrated LED module with CRI >90 for superior color fidelity. Operating via tool-free magnetic mounting powered by a remote 48V DC driver, it provides flexible, glare-controlled accent lighting suited for sophisticated retail, hospitality, and residential environments.



TECHNICAL DATA:

Power: 8W
Lumen: 550Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00012m3
Gross Weight: 0.21 Kg
Net Weight: 0.15 Kg

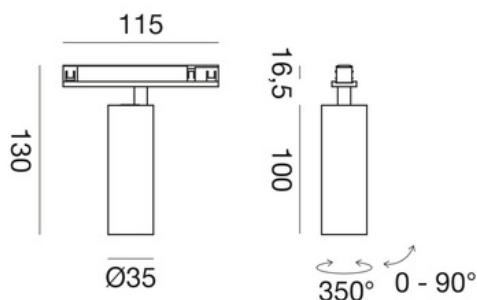

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be


GFA - 8W

An indoor architectural luminaire engineered for integration into 48V low-voltage magnetic track systems. Featuring a clean, robust housing with adjustable optical orientation, it utilizes a high-efficiency integrated LED module with CRI >90 for superior color fidelity. Operating via tool-free magnetic mounting powered by a remote 48V DC driver, it provides flexible, glare-controlled accent lighting suited for sophisticated retail, hospitality, and residential environments.



TECHNICAL DATA:

Power: 8W
Lumen: 550Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00012m3
Gross Weight: 0.21 Kg
Net Weight: 0.15 Kg

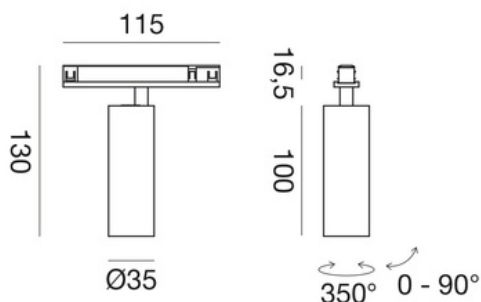

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be

GFA - 8W


An indoor architectural luminaire engineered for integration into 48V low-voltage magnetic track systems. Featuring a clean, robust housing with adjustable optical orientation, it utilizes a high-efficiency integrated LED module with CRI >90 for superior color fidelity. Operating via tool-free magnetic mounting powered by a remote 48V DC driver, it provides flexible, glare-controlled accent lighting suited for sophisticated retail, hospitality, and residential environments.

GFA1805



TECHNICAL DATA:

Power: 8W
Lumen: 550Lm
Color Temperature: 3000K
Power Supply: 48V DC
IP Rating: IP20
Light Beam: 30° _ Orientabile
CRI: >90
Lifespan: 25.000h
Insulation Class: III
Installation: Interno _ Sistema a binario
Source: Led integrato
Dimming: Non dimmerabile _ On - Off
Volume: 0,00012m3
Gross Weight: 0.21 Kg
Net Weight: 0.15 Kg

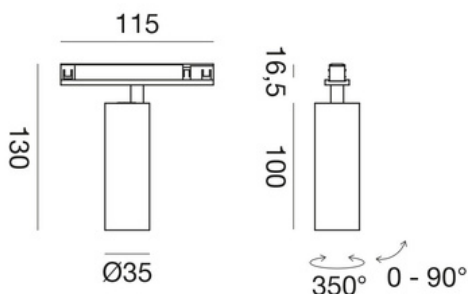

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be