

Stick Trimless


9W trimless LED spotlight with 994 lm, CRI >90, 24°/36° beam, 2700K, IP20 and DALI, 1-10V or phase-cut dimming.

PRODUCT MATERIAL	Die-cast Aluminium
LIGHT SOURCE	Bridgelux V8 Array
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS	○ 3 = RAL 9003 white
BEAM ANGLE	24°
ADJUSTABLE	Yes - 0-20° - 360°
SIZE	Ø90 X 85mm



OPTIONS

OPTIONAL BEAM ANGLE	36°	Art. no.: 4912.010.36.0
ANTI-GLARE RING	Black	Included
	White	Art. no.: 4912.922.99.3
	Gold	Art. no.: 4912.922.99.9
GLASS	Prismatic	Art. no.: 4912.933.94.0
	Frosted	Art. no.: 4912.933.90.0
	Striped	Art. no.: 4912.933.96.0
HONEYCOMB		Art. no.: 4912.933.91.0
DRIVER OPTIONS 350mA	On/off	350mA 1-9W Art. no.: 0110.350.10.1
	Phase cut	350mA 3-7W Art. no.: 0107.350.20.1
	1/10V	350mA 0-15W Art. no.: 0115.350.30.0 Max. 2 fixtures connected in serie per driver
	DALI	350mA 3-18W Art. no.: 0118.350.40.0 Max. 2 fixtures connected in serie per driver
DRIVER OPTIONS 500mA	On/off	500mA 6-10W Art. no.: 0110.500.10.0
	Phase cut	500mA 6-10W Art. no.: 0110.500.20.7
	DALI	500mA 4-18W Art. no.: 0118.500.40.0 Max. 2 fixtures connected in serie per driver
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST 18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST 18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

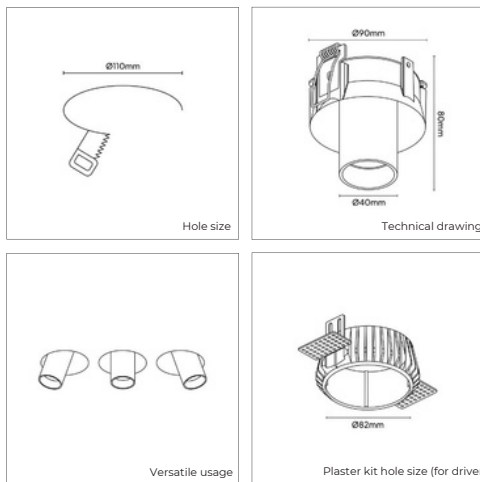

INFORMATION

Including plaster kit

Always select a driver option and add the selected driver to your order.

- Pay attention at the inner size (Ø82mm) of the plaster kit, as the
- Full warranty only applies when fixture is purchased in
- combination with recommended driver.

HONEYCOMB



ANTI-GLARE RING



GLASS



ARTICLE NUMBE R	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4918.350.24.3	V8	Bridgelux	550lm	6.3W	88lm/W	2700K	>90	50.000 Hrs	350mA
4918.500.24.3	Array	x	994lm	9W	110lm/W	2700K	>90	50.000 Hrs	500mA
	V8	Bridgelux							
	Array	x							

Disclaimer

Alle technische gegevens, evenals gewichts- en afmetingsspecificaties, zijn gebaseerd op standaardwaarden. Wij behouden ons het recht om technische wijzigingen aan te brengen. Productafbeeldingen dienen ter illustratie en kunnen afwijken van het origineel.

FL

www.formaluna.be